

### SEALING CAPABILITIES



### LONGEVITY



### PUNCTURES MM



### SLICES MM



### SEALING SIDEWALL POROSITY



### LOWER TEMPERATURE LIMIT °C




### CORROSIVE

**NO**

### INTERMIXABLE (W/IN ORANGE SEAL)



### AVERAGE SEALANT LIFE (DAYS)

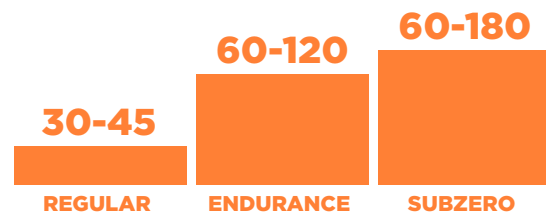

### TUBELESS TIRES

**YES**

### TUBES

**YES**

### TUBULARS

**YES**

### QUANTITY (PER TIRE)

	REGULAR	ENDURANCE	SUBZERO
ROAD	30-60 ml	30-60 ml	30-60 ml
MTN 26"	90 ml	90 ml	90 ml
MTN 27.5"	90 ml	90 ml	90 ml
MTN 29"	120 ml	120 ml	120 ml
FAT	160-240 ml	160-240 ml	160-240 ml

